



PLUS SHINGLES • APP modified bitumen (TÜM approved)



>>> Victorian® PLUS (01) Black






PLUS SHINGLES • APP modified bitumen (TÜM approved)

Your Benefits:

- APP modified bitumen (TÜM approved)
- Superior quality high grade bitumen fibreglass shingle
- Exceeds the most stringent worldwide standards
- Additional UV protection thanks to APP Bitumen
- Higher flexibility with low(er) temperatures

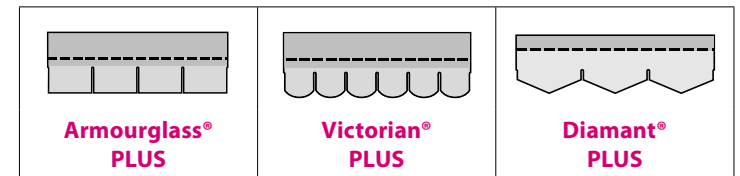

Length (EN 544)	1000 mm (± 3)	1000 mm (± 3)	1000 mm (± 3)
Width (EN 544)	336 mm (± 3)	336 mm (± 3)	284 mm (± 3)
Weight (slope > 25°)	± 11,4 kg/m ²	± 10,9 kg/m ²	± 11,0 kg/m ²
Coverage/bundle	max. 2 m ²	max. 2 m ²	max. 2 m ²
Shingles/bundle	14	14	18
Bundles/pallet	66	66	60

Granule adhesion (EN 12039)	max. 1,2 g	max. 1,2 g	max. 1,2 g
Tensile length* (EN 12311-1)	900 N/50 mm	900 N/50 mm	900 N/50 mm
Tensile width* (EN 12311-1)	500 N/50 mm	500 N/50 mm	500 N/50 mm
Elongation length* (EN 12311-1)	3,00 %	3,00 %	3,50 %
Elongation width* (EN 12311-1)	3,00 %	3,00 %	3,50 %
Nail tear resistance* (EN 12311-1)	160 N	160 N	160 N

External fire performance	B _{roof} T ₁	B _{roof} T ₁	B _{roof} T ₁
Reaction to fire	Class E	Class E	Class E

* Registered average values



IKO Sales International NV
 I.Z. Ravenshout 3.974 • Truibroek 74 • 3945 Ham • Belgium
 T +32 (0)11 34 01 20 • F +32 (0)11 34 01 30
 E residential.europe@iko.com • www.iko.be

