


A 20-3 TYPE WATERSTOP

DESCRIPTION

HYDROFLEX PVC WATERSTOPS

- These waterstops are used in movement or expansion joints between foundation and retaining wall, between retaining wall and retaining wall, etc.
- High bending resistance and flexibility.
- High water pressure resistance.
- Waterstops are joined to each other by thermal welding.

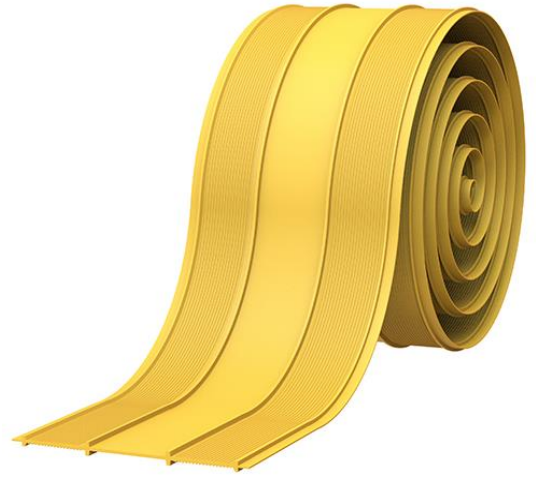

TECHNICAL DATAS


APPLICATION AREAS

- Hydraulic power plants
- Underground constructions
- Bridges and viaducts
- Retaining walls, water channels
- Basement and concrete foundations
- Water treatment facilities
- Swimming pools, etc.

PRODUCT DETAILS

Product Code	Width (a)	Thickness (c)	Product Length
Type A 20-3	200 mm	3.0 mm	20 m

Dimensions may vary $\pm 10\%$.

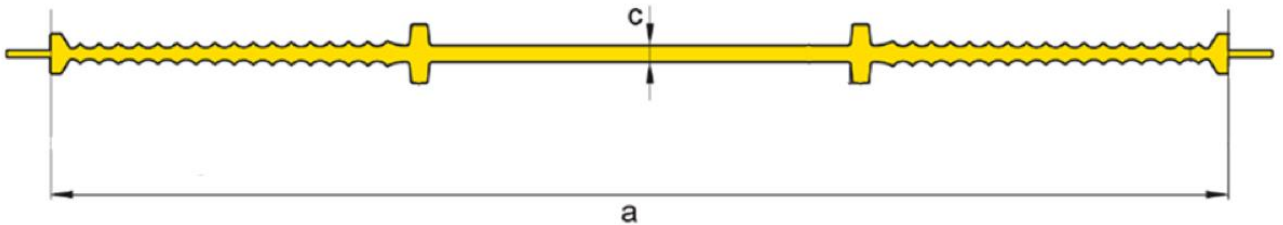

PROPERTIES

Mechanical Properties

<i>Analysis</i>	<i>Unit</i>	<i>Result</i>
<i>Hardness</i>	<i>Shore A</i>	<i>75 ± 5</i>
<i>Tensile Strength</i>	<i>MPa</i>	<i>7 ± 0.35</i>
<i>Elongation at Break</i>	<i>%</i>	<i>225 ± 10</i>

Values may vary by ± 10%.

